Planning Department, 51 Winburn Way, Ashland, Oregon 97520
541-488-5305 Fax: 541-552-2050 www.ashland.or.us TTY: 1-800-735-2900

CITY OF ASHLAND

NOTICE OF APPLICATION

PLANNING ACTION: PA- 2017-02243
SUBJECT PROPERTY: 430 N. Main St.
OWNER/APPLICANT: City of Ashland
DESCRIPTION: A request for a land partition to divide the city-owned property at 430 North Main Street into two parcels.
COMPREHENSIVE PLAN DESIGNATION: Employment; ZONING: E-1; ASSESSOR'S MAP #: 391E 05DA; TAX LOT: 2700

NOTICE OF COMPLETE APPLICATION: December 11, 2017
DEADLINE FOR SUBMISSION OF WRITTEN COMMENTS: December 26, 2017

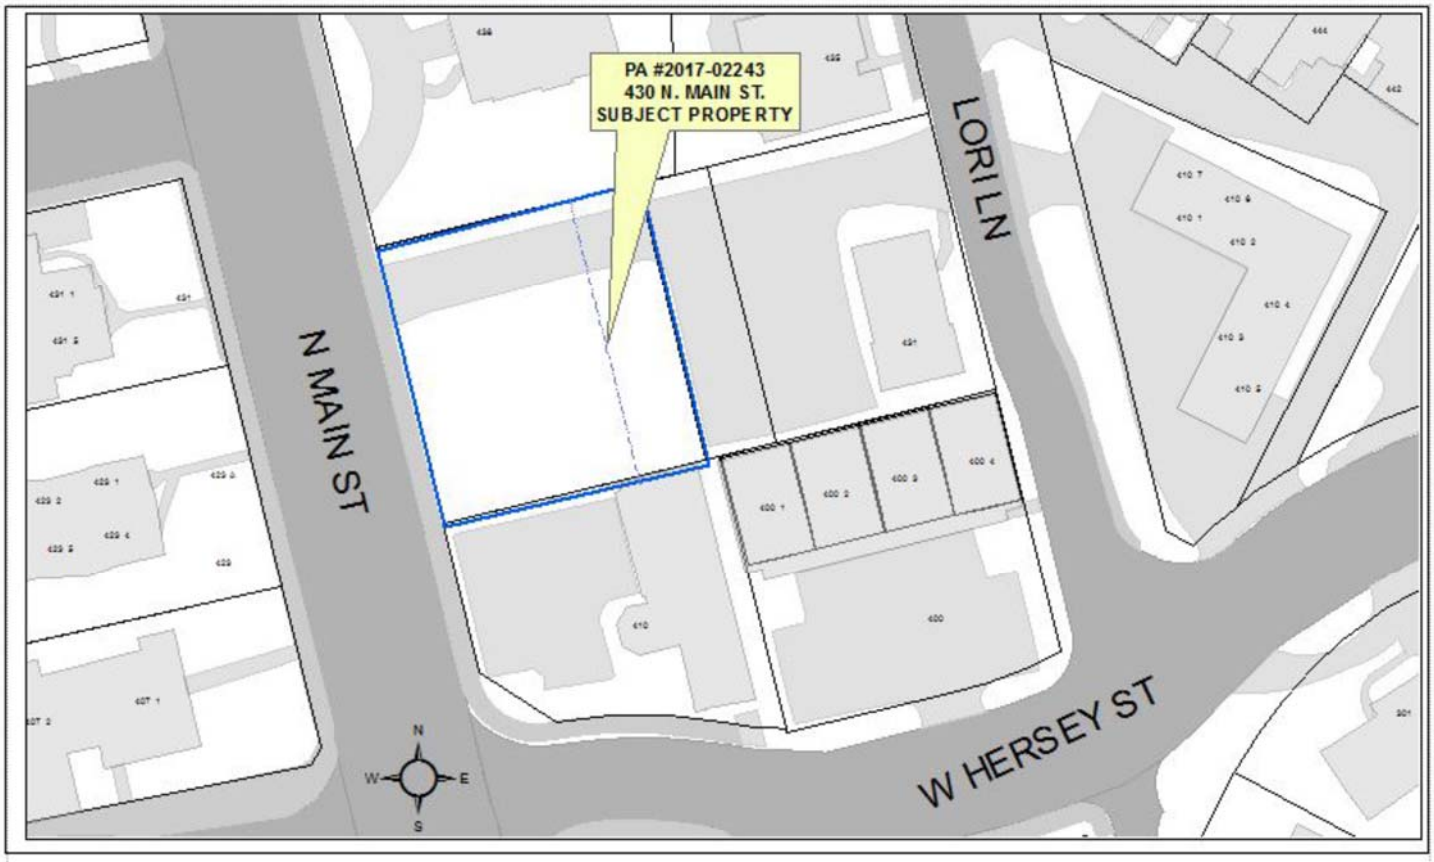

The Ashland Planning Division Staff has received a complete application for the property noted above.

Any affected property owner or resident has a right to submit written comments to the City of Ashland Planning Division, 51 Winburn Way, Ashland, Oregon 97520 prior to 4:30 p.m. on the deadline date shown above.

Ashland Planning Division Staff determine if a Land Use application is complete within 30 days of submittal. Upon determination of completeness, a notice is sent to surrounding properties within 200 feet of the property submitting application which allows for a 14 day comment period. After the comment period and not more than 45 days from the application being deemed complete, the Planning Division Staff shall make a final decision on the application. A notice of decision is mailed to the same properties within 5 days of decision. An appeal to the Planning Commission of the Planning Division Staff's decision must be made in writing to the Ashland Planning Division within 12 days from the date of the mailing of final decision. (AMC 18.5.1.050.G)

The ordinance criteria applicable to this application are attached to this notice. Oregon law states that failure to raise an objection concerning this application, by letter, or failure to provide sufficient specificity to afford the decision maker an opportunity to respond to the issue, precludes your right of appeal to the Land Use Board of Appeals (LUBA) on that issue. Failure to specify which ordinance criterion the objection is based on also precludes your right of appeal to LUBA on that criterion. Failure of the applicant to raise constitutional or other issues relating to proposed conditions of approval with sufficient specificity to allow this Department to respond to the issue precludes an action for damages in circuit court.

A copy of the application, all documents and evidence relied upon by the applicant and applicable criteria are available for inspection at no cost and will be provided at reasonable cost, if requested. All materials are available at the Ashland Planning Division, Community Development & Engineering Services Building, 51 Winburn Way, Ashland, Oregon 97520.

If you have questions or comments concerning this request, please feel free to contact the Ashland Planning Division at 541-488-5305.

PRELIMINARY PARTITION PLAT
18.5.3.050

The approval authority shall approve an application for preliminary partition plat approval only where all of the following criteria are met.

A. The future use for urban purposes of the remainder of the tract will not be impeded.
B. The development of the remainder of any adjoining land or access thereto will not be impeded.
C. The partition plan conforms to applicable City-adopted neighborhood or district plans, if any, and any previous land use approvals for the subject area.
D. The tract of land has not been partitioned for 12 months.
E. Proposed lots conform to the requirements of the underlying zone, per part 18.2, any applicable overlay zone requirements, per part 18.3, and any applicable development standards, per part 18.4 (e.g., parking and access, tree preservation, solar access and orientation).
F. Accesses to individual lots conform to the standards in section 18.4.3.080 Vehicle Area Design. See also, 18.5.3.060 Additional Preliminary Flag Lot Partition Plat Criteria.
G. The proposed streets, utilities, and surface water drainage facilities conform to the street design standards and other requirements in part 18.4, and allow for transitions to existing and potential future development on adjacent lands. The preliminary plat shall identify all proposed public improvements and dedications.
H. Unpaved Streets.
    1. Minimum Street Improvement. When there exists a 20-foot wide access along the entire street frontage of the parcel to the nearest fully improved collector or arterial street, as designated in the Comprehensive Plan, such access shall be improved with an asphaltic concrete pavement designed for the use of the proposed street. The minimum width of the street shall be 20-feet with all work done under permit of the Public Works Department.
    2. Unpaved Streets. The Public Works Director may allow an unpaved street for access for a land partition when all of the following conditions exist.
        a. The unpaved street is at least 20-feet wide to the nearest fully improved collector or arterial street. The City may require the street to be graded (cut and filled) to its standard physical width, and surfaced as required in chapter 18.4.6 prior to the signature of the final partition plat by the City.
        b. The centerline grade on any portion of the unpaved street does not exceed ten percent.
        c. The final elevation of the street shall be established as specified by the Public Works Director except where the establishment of the elevation would produce a substantial variation in the level of the road surface. In this case, the slope of the lot shall be graded to meet the final street elevation.
        d. Should the partition be on an unpaved street and paving is not required, the applicant shall agree to participate in the costs and to waive the rights of the owner of the subject property to remonstrate both with respect to the owners agreeing to participate in the cost of full street improvements and to not remonstrate to the formation of a local improvement district to cover such improvements and costs thereof. Full street improvements shall include paving, curb, gutter, sidewalks, and the undergrounding of utilities. This requirement shall be precedent to the signing of the final survey plat, and if the owner declines to so agree, then the application shall be denied.
I. Where an alley exists adjacent to the partition, access may be required to be provided from the alley and prohibited from the street.
J. Required State and Federal permits, as applicable, have been obtained or can reasonably be obtained prior to development.

The additional criteria for a Preliminary Flag Lot Partition Plat are described in AMC Chapter 18.5.3.060 as follows:
The approval authority shall approve a preliminary plat application for a flag lot partition only where all of the following criteria are met.

A. The criteria of section 18.5.3.050 are met.

B. For the purpose of meeting the minimum lot area requirement, the lot area, exclusive of the flag drive area, must meet the minimum square footage requirements of the zoning district.

C. Flag drives shall be in the same ownership as the flag lots served. Where two or more lots are served by the same flag drive, the flag drive shall be owned by one of the lots and an easement for access shall be granted to the other lot or lots.

D. Except as provided in subsection 18.5.3.060.H, below, the flag drive serving a single flag lot shall have a minimum width of 15 feet and contain a 12 foot wide paved driving surface. For drives serving two flag lots, the flag drive shall be 20 feet wide, with a 15 foot wide driving surface to the back of the first lot, and a 12 foot wide driving surface to the rear lot. Drives shared by adjacent properties shall have a width of 20 feet, with a 15 foot paved driving surface. Width shall be increased on turns where necessary to ensure fire apparatus remain on a paved surface during travel.

E. Curb cuts have been minimized, where possible, through the use of common driveways. No more than two flag lots are served by the flag drive.

F. Flag drive grades shall not exceed a maximum grade of 15 percent. Variances may be granted for flag drives for grades in excess of 15 percent but no greater than 18 percent for not more than 200 feet. Such variances shall be required to meet all of the criteria for approval in chapter 18.5.5 Variances.

G. Flag drives shall be constructed to prevent surface drainage from flowing over sidewalks or other public ways.

H. Flag lots adjacent to an alley shall meet all of the requirements of this section, except that:

1. Vehicle access shall be from the alley only where required as a condition of approval.

2. No screening and paving requirements shall be required for the flagpole.

3. *A four foot pedestrian path shall be installed within the flagpole and improved and maintained with either a concrete, asphalt, brick, or paver block surface connecting the street to the buildable area of the flag lot.*

4. *The flag pole width shall be no less than eight feet wide and the entrance of the pole at the street shall be identified by the address of the flag lot clearly visible from the street on a four-inch by four-inch post that is 3½ feet high. The post shall be painted white with black numbers three inches high running vertically down the front of the post. For flagpoles serving two or more dwellings, the addresses of such dwellings shall be on a two foot by three foot white sign clearly visible from the street with three-inch black numbers.*

I. *Flag drives and fire work areas shall be deemed Fire Apparatus Access Roads under the Oregon Fire Code and subject to all requirements thereof.*

J. *When required by the Oregon Fire Code, flag drives greater than 150 feet in length shall provide a turnaround (see Figure 18.4.6.040.G.5). The Staff Advisor, in coordination with the Fire Code Official, may extend the distance of the turnaround requirement up to a maximum of 250 feet in length as allowed by Oregon Fire Code access exemptions.*

K. *Each flag lot has at least three parking spaces situated to eliminate the necessity for vehicles backing out.*

L. *There shall be no parking within ten feet of the centerline of the drive on either side of the flag drive entrance.*

M. *Flag drives serving structures greater than 24 feet in height, as defined in part 18.6, shall provide a fire work area of 20 feet by 40 feet clear of vertical obstructions and within 50 feet of the structure. The fire work area requirement shall be waived if the structure served by the drive has an approved automatic sprinkler system installed.*

N. *Both sides of the flag drive have been screened with a site-obscuring fence, wall or evergreen hedge to a height of from four to six feet, except in the front yard setback area where, starting five feet from the property line, the height shall be from 30 to 42 inches in the remaining setback area. Such fence or landscaping shall be placed at the extreme outside of the flag drive in order to ensure adequate fire access.*

O. *The applicant has executed and filed with the Community Development Department an agreement between applicant and the City for paving and screening of the flag drive. Such an agreement shall specify the period within which the applicant, or agent for applicant, or contractor shall complete the paving to standards as specified by the Public Works Director and screening as required by this section, and providing that if applicant should fail to complete such work within such period, the City may complete the same and recover the full cost and expense thereof from the applicant. An agreement shall also provide for the maintenance of the paving and screening pursuant to this section, and assurance ongoing maintenance.*

P. *Flag lots shall be required to provide a useable yard area that has a minimal dimension of 20 feet wide by 20 feet deep. As used in this chapter, the term "useable yard area" means a private yard area which is unobstructed by a structure or automobile from the ground upward.*